


Proctor Air[®]

THE AIR & VAPOUR PERMEABLE PITCHED ROOF UNDERLAY

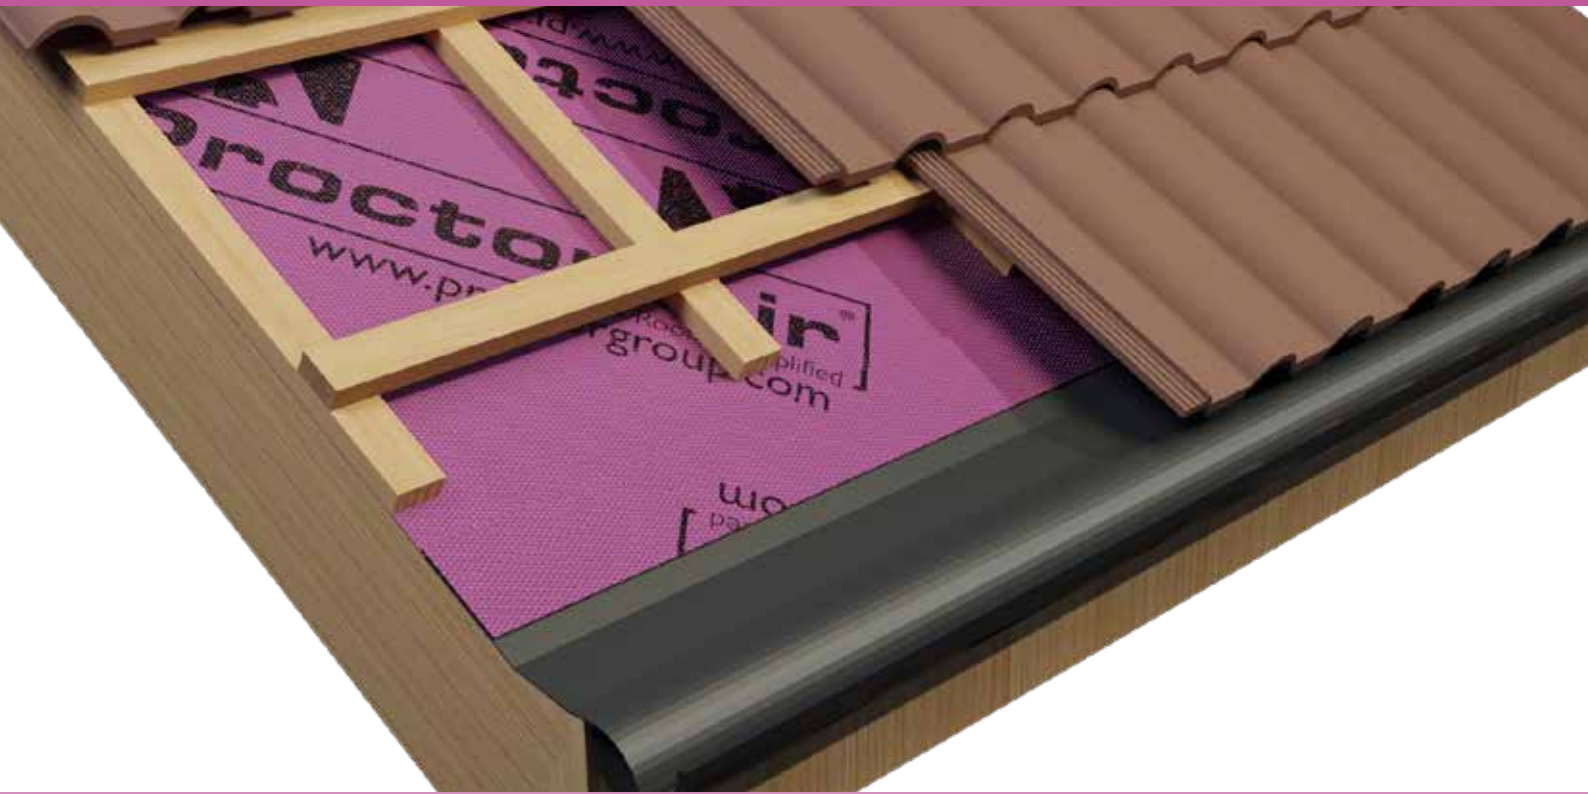

Proctor Air[®]
Roofing simplified

**Proctor**
Group

Contents

Proctor Air

Roofing Design Considerations Pages 3-5

- Condensation Control & Ventilation
- Non-Ventilated Warm & Cold Roof Construction
- The Need for Breather Membranes
- Typical Roof Construction Details

Standards & Building Regulations Page 6

- Building Regulations
- Product & Performance Standards
- NFRC Technical Bulletin 6

Proctor Air Pages 7-11

- Why Proctor Air?
- Key Features
- Product Application Details

Technical Data Pages 12-13

- Physical Properties
- Technical Support

FAQ's Pages 14-15

- Frequently Asked Questions

A. Proctor Group


Experts in membrane systems

The A. Proctor Group has, for 50 years, been serving the construction industry with an extensive portfolio of technically advanced thermal, acoustic and membrane products.

The range offers innovative solutions to address the challenges of interstitial condensation, hard to treat solid walls, airtightness, and includes a range of membranes with Class A Reaction to fire in roof and wall structures.

Total Solution Capabilities

From concept to completion

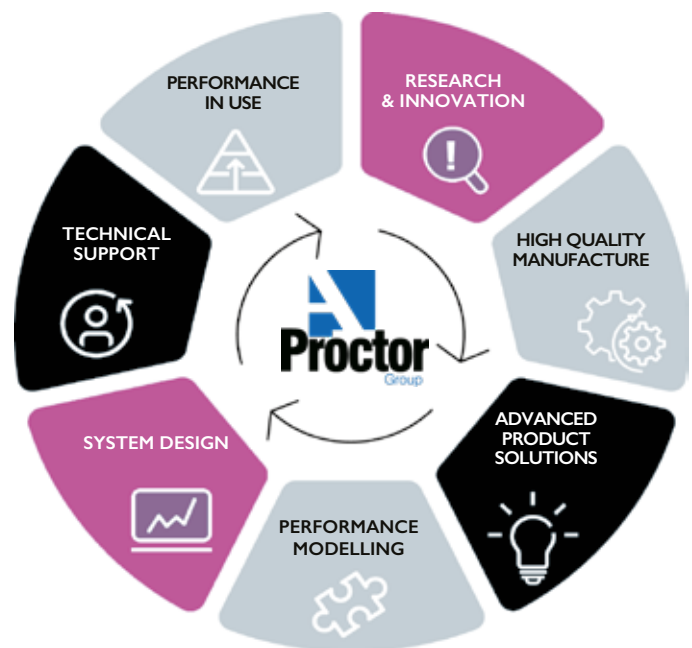

Our products are backed up by a dedicated team of technical experts, able to assist at every project stage from pre-planning to on site. We offer CAD detail reviews, installation guidance, condensation risk analysis, WUFI® calculations, U-Value calculations, ground gas system designs, telephone support & more. Our products also have a range of BIM Objects & Performance Specifications.

Condensation Control



Innovative high performing solutions

The A. Proctor Group is at the forefront of the development of vapour permeable membranes, vapour control layers and condensation control solutions for all areas of the building envelope.

Moisture vapour will pass through the various layers of any construction by both convection and diffusion. The objective is to ensure, by design, that the moisture vapour can disperse to the outside atmosphere without being cooled to below dewpoint temperature, thus eliminating condensation and associated problems such as mould growth.

Our range of innovative solutions includes Proctor Air.

Condensation Control



Roofing Design Considerations

Condensation Control and Ventilation

As Building Regulations demand ever-higher thermal efficiency, today's buildings are becoming increasingly airtight. While this is undoubtedly beneficial for building energy performance, architects and contractors must understand the implications for moisture and vapour management when considering roofing membranes.

Condensation control should be considered as part of the design process. Successful control will depend on factors such as prevailing winds, room layout, number of storeys and type of heating system as well as the more usually accepted aspects such as construction, heating, ventilation and moisture production. All these aspects, therefore, should be considered carefully and, as they are interdependent to a greater or lesser degree, they should be considered together.

The fundamental principle in designing to minimize condensation is to maintain a balance of the three factors 1. Thermal and vapour properties of the structure 2. Heat input and 3. Ventilation to achieve either low vapour pressure and/or high structural temperature.

The building fabric, typical weather conditions and anticipated occupancy patterns and uses will all interact to define the moisture risks associated with the construction. These "ground rules" form the basis of a good hygrothermal design strategy.

Once an understanding of the building, weather and occupancy are achieved, the designer can then focus on ensuring the heat, air and moisture movement within the structure is properly balanced. This ensures both a healthy environment for the occupants of the building and long life for the building.


The Need for Breather Membranes

Since their introduction in the late 1980s, "breather membranes" have become an important part of the construction industry landscape, however, the term itself is widely misunderstood. "Breather membrane" relates to membranes used in timber frame walls, with a vapour resistance of $S_d 0.12m$ (0.6MN/g) or less, while for those membranes used on roofs, the term "vapour permeable underlay" is more appropriate, these membranes must have a vapour resistance of $S_d 0.05m$ (0.25MN/g) or lower. It can be argued that higher performance, air-permeable membranes such as Proctor Air, are "breathable" in the truest sense.

All activities within a building, from initial construction and wet trades, to cooking and washing, generate substantial amounts of water vapour, which must be managed successfully to ensure the longevity of the building fabric and a healthy indoor environment. The vapour permeable structure used in these membranes allows this to be achieved without compromising temporary weather protection during construction or requiring complex and expensive passive or active ventilation systems and accessories.

Non-Ventilated Warm Roof Construction


A “warm roof” is a roof construction where the insulation layer is placed either over or between the rafters, and follows the pitch of the roof from eaves to ridge. This configuration keeps the roof structure within the heated envelope of the building and allows spaces within the roof to be used as habitable spaces, or easily converted at a later date. Warm roofs are typically insulated using rigid boards, and the underlay may be installed either fully supported, or draped, depending on the location of the insulation.

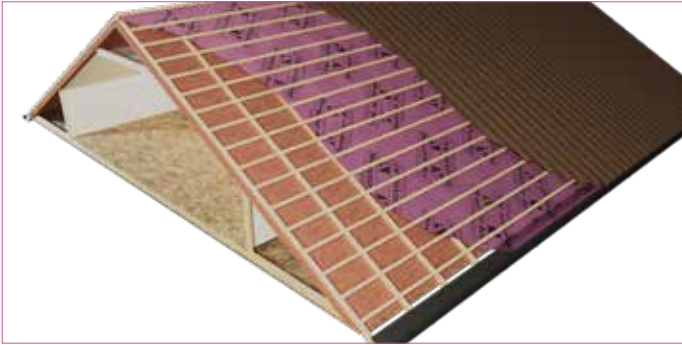

Warm Roof Construction

Non-Ventilated Cold Roof Construction


In a cold pitched roof construction, the insulation is placed horizontally at ceiling level, running from eaves to eaves, leaving the loft and roof structure above the heated envelope of the building. Traditionally, this cold loft space would require ventilation, but this can be impractical for some roof configurations, and avoiding such ventilation has long been desirable.

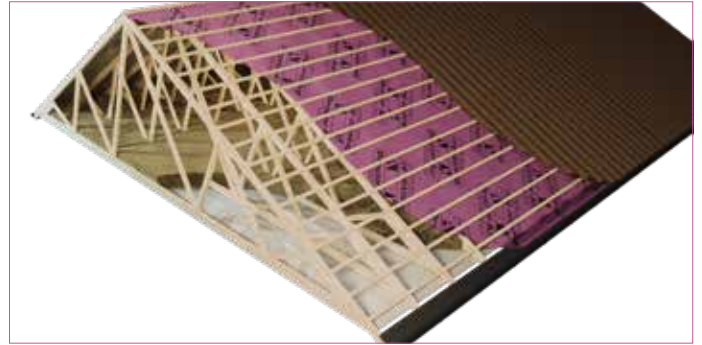

Cold Roof Construction

Wind Uplift Resistance

Batten Gauge	Declared wind uplift resistance Pa (N/m ²)	Accessories	Zone Suitability
≤345mm	1559.4	NONE	1 - 4
	3036.7	WRAPTITE TAPE	1-5
≤250mm	>3000	NONE	1 - 5

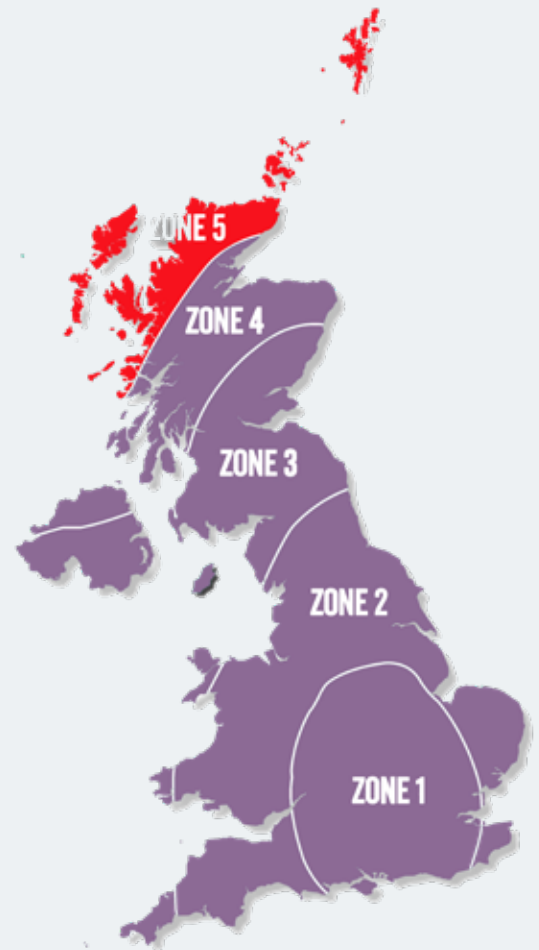

NO TAPE REQUIRED IN ZONES 1-4

Typical Roof Constructions

Cold Roof Slate Sarking Detail



1. Slate
2. Proctor Air
3. Timber sarking / Board
4. Rafter

Cold Roof Tile Detail



1. Tile
2. Batten
3. Proctor Air (draped)
4. Rafter

Metal Roof Profile Detail



1. Metal Cladding
2. Ventilation air space
3. Proctor Air
4. Insulation
5. Vapour Control Layer
6. Metal Lining

Warm Roof Slate Sarking Detail



1. Slate
2. Proctor Air
3. Timber sarking / Board
4. Insulation
5. Rafter

Warm Roof Tile Detail



1. Tile
2. Batten
3. Counter batten
4. Proctor Air
5. Insulation
6. Rafter

Warm Roof Tile Alternate Detail



1. Tile
2. Batten
3. Proctor Air (draped)
4. Counter batten
5. Insulation
6. Rafter

Warm Roof Tile with OSB Detail



1. Tile
2. Batten
3. Counter batten
4. Proctor Air
5. OSB
6. Insulation
7. Rafter

Warm Roof Tile with OSB Alternate Detail



1. Tile
2. Batten
3. Proctor Air (draped)
4. Counter batten
5. OSB
6. Insulation
7. Rafter

Standards & Building Regulations

With the increased spotlight and focus on building regulations and the suitability of materials specified for use within building construction, the correct selection and application of materials are at their most critical. The key guidance on meeting the requirements of Building Regulations for England, Ireland and Wales, and Building Standards (Scotland) relating to ventilation, thermal efficiency, moisture and condensation control is outlined within the Approved Documents and Technical Standards below.

For specific advice on any of these please contact our technical support on 01250 872261.

Building Regulations

- Approved Document C Site Preparation and Resistance to Contaminants and Moisture 2013
- Technical Guidance Document C Site Preparation and Resistance to Moisture (Ireland 1997) Amendments 2020
- Building Standards Section 3 Environment (Scotland 2020)
- Approved Document L - Conservation of Fuel & Power (2021 incorporating 2023 amendments)
- Technical Guidance Document L - Conservation of Fuel and Energy (Ireland 2022)
- Building Standards Section 6 Energy (Scotland 2020)
- Approved Document B Fire Safety
- Approved Document F Means of Ventilation (England & Wales)
- Technical Guidance Document F - Ventilation (Ireland 2019)



Product & Performance Standards

- BS 5250: 2021 - Management of Moisture in Buildings. Code of Practice
- BS EN 15026:2007 Hygrothermal Performance of Building Components and Building Elements
- BS EN ISO 13788:2012 Hygrothermal performance of Building Components and Building Elements. Internal surface temperature to avoid critical surface humidity and interstitial condensation - Calculation methods.

Standards & Building Regulations

NFRC Technical Bulletin 6

Released by the National Federation of Roofing Contractors in 2012, Technical Bulletin 6 outlines best practice for roof system installers. TB6 aligns itself with the NHBC technical standards by recommending high-level ventilation where airtight type LR underlays are used. As with the NHBC standard, however, it is recognised that this provision is unnecessary where the underlay is both vapour and air permeable, therefore Proctor Air is exempt from this recommendation.



Why Proctor Air?

Proctor Air is an air permeable low resistance (APLR) underlay for pitched roof applications.

While the majority of APLRs in use today utilise an airtight, vapour permeable, film layer to achieve their performance, Proctor Air's SMS (Spunbond Meltblown Spunbond) structure allows high levels of airflow in addition to the transport of moisture vapour, making the formation of condensation virtually impossible.

Independent studies of the effect of air permeability have confirmed that lofts using air permeable underlays have more consistent air-flow through the roof than those found in traditionally ventilated lofts, according to BS5250, so whatever side of the vents/no vents debate you sit on, Proctor Air has it covered.

Its heavyweight 170gsm three-layer structure also containing a hydrophobic in every layer, gives a Class W1 rating under the latest EN13859-1 specifications.



15 YEAR WARRANTY



Proctor Air - Key Features

VAPOUR PERMEABLE

Proctor Air has an Sd-value of 0.015m and a vapour resistance of 0.075 MNs/g, making Proctor Air one of the highest performing vapour-permeable membranes on the market.

FULLY AIR PERMEABLE

Air permeable membranes allow air movement through the roof, as well as allowing moisture to escape by diffusion. This means that condensation is far less likely to form on the membrane itself, and also allows the membrane to deal with much higher moisture levels within the building, for example during the drying out period.

HIGHLY WATER RESISTANT

Proctor Air is rated W1 under EN13859-1, and has a hydrophobic additive in all 3 layers. The membrane can be left exposed to provide temporary weather protection to the building envelope for up to three months (see FAQs, page 14-15). Proctor Air has a Hydrostatic Head of water of over 1m as recommended by NFRC Technical Bulletin 6. It is good practice not to leave the underlay exposed longer than necessary.

WIND UPLIFT RESISTANCE COMPLIES WITH BS5534

Based on fully independent 3rd party testing, Proctor Air can be utilised across the UK. This, in addition to no requirement for high level ventilation or the use of a vapour control layer, ensures Proctor Air remains the simplest and most cost effective method of achieving regulation compliance.

MORE UNIFORM AIRFLOW THAN VENTS

The air permeability of Proctor Air means a non-ventilated roof fitted with Proctor Air allows a more consistent air flow through the roof than a roof ventilated as per BS5250, without expensive and time consuming ventilation hardware fitted to the roof.

BBA CERTIFIED 24/7147

Proctor Air is fully BBA certified for use in non-ventilated warm or cold roof applications.

SOLAR / PV PANELS

A unique feature of Proctor Air's BBA certificate is the clarification that it can be used on roofs featuring solar PV, as long as appropriate consideration is made to the requirement of a ventilated batten/counter batten space. This recommendation is in line with current requirements for tightly-jointed slates, tiles and metal sheet, all of which may also normally be considered air impermeable and therefore the addition of a ventilated batten/counter batten, above the Proctor Air, is required, as per BS 5250.

NO VCL REQUIRED

Installing Proctor Air will mean that a vapour control layer is not required for non-ventilated cold pitched roof constructions.

15 YEAR WARRANTY

Proctor Air's 15-year warranty provides peace of mind on any project.

ENERGY EFFICIENCY

Energy Loss by ventilation in conventionally ventilated cold roofs will be significantly reduced by the non-vented system.

Proctor Air Details

DUOPITCH RIDGE DETAIL

Proctor Air overlapping minimum 150mm on both sides of ridge



Proctor Air fully supported on insulation


MONOPITCH RIDGE DETAIL



Proctor Air taken over ridge board, minimum 150mm

Proctor Air Details


EAVES DETAIL

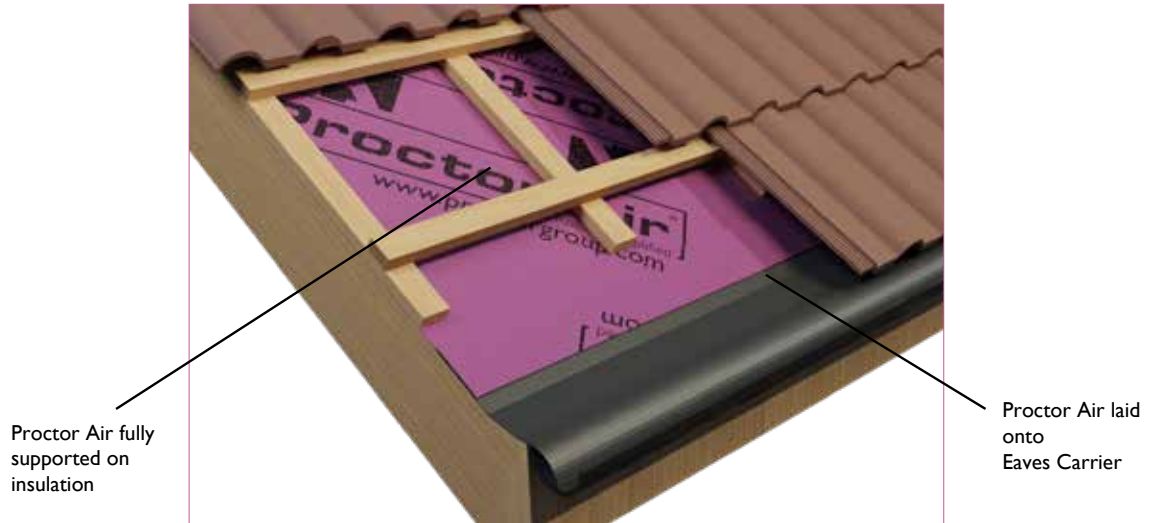

VERGE-ABUTMENT DETAIL




SOLAR / PV DETAIL

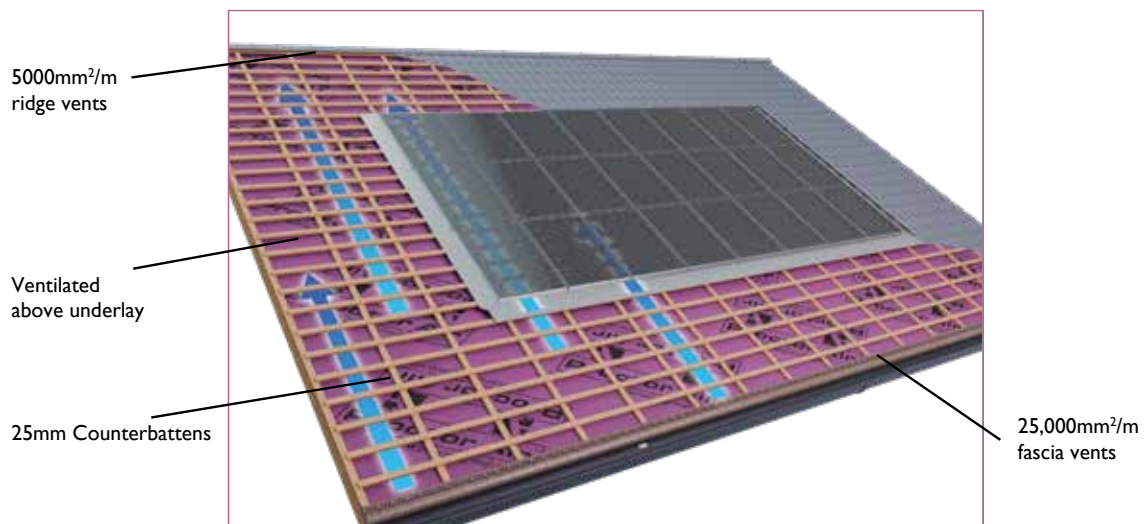

Proctor Air Details


VALLEY DETAIL

Proctor Air taken over edge batten

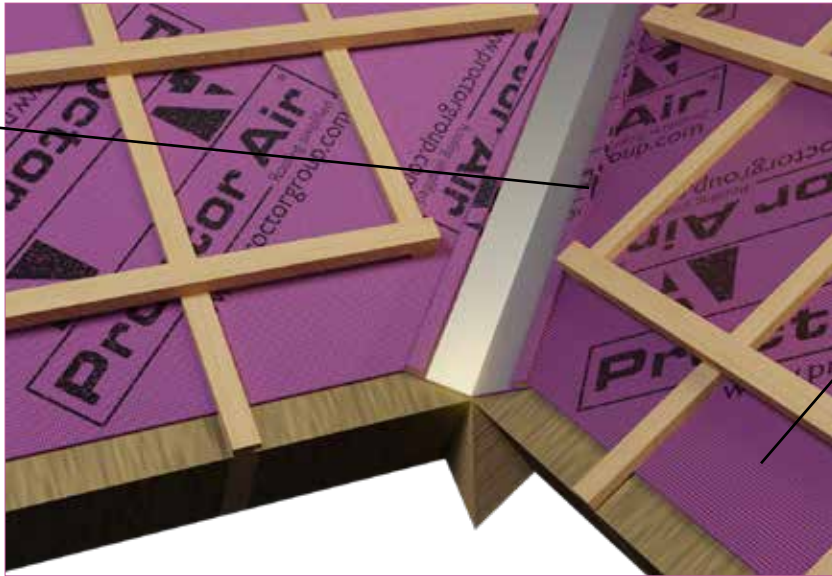

Proctor Air

PIPE DETAIL

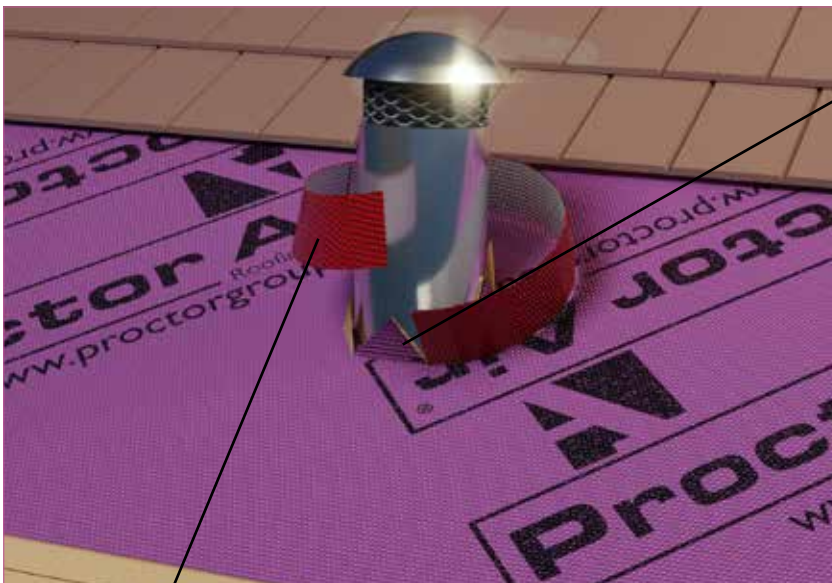

Proctor Air with star cut dressed up pipe and taped in position

Wraptite Tape

Proctor Air - Physical Properties

Property		Test Method	Mean Results	
Standard Roll Size			1m x 50m & 1.5m x 50m	
Mass per unit area		EN 1849-2	170g/m ²	
Reaction to Fire		EN 13501-1 (EN 11925-2)	Class E	
Water vapour resistance Sd		EN 12572	0.015m	
Vapour resistance		EN 12572	0.075 MNs/g	
Air permeability (Average)		EN 12114	35 m ³ /m ² .h.50Pa	
Water penetration		EN 1928	Class W1	
Hydrostatic Head of Water		ISO 811	> 1m	
Tensile Strength	Before ageing	EN 12311-1	MD 330 N/50mm	CD 270 N/50mm
	After ageing		MD 280 N/50mm	CD 225 N/50mm
Elongation	Before ageing	EN 12311-1	MD 56%	CD 68%
	After ageing		MD 39%	CD 48%
Tear resistance		EN 12310-1	MD 188N	CD 172N
Mullen Burst Strength	Upper face	BS 3137:1972	1124 kPa	
	Lower face		1115 kPa	
Slip Resistance	Dry	BBA Internal Test	MD 78	CD 79
	Wet		MD 64	CD 68

Proctor Air® Warranty

Specify Responsibly



Polypropylene is recyclable. Mechanical recycling is the primary option, depending of the requirements of the application and the intended article specification. It can also be valorised for energy recovery, its high calorific value is around 44 MJ/kg.

Polyolefins are neither biodegradable nor compostable.



Case Study - Hatchmeadow Apartments, Northumberland

A significant challenge when working on the roof of any existing, occupied building is protecting the people inside the building without the full roof system in place. That challenge is multiplied when the building in question is large and work has to be carried out in sections over a longer period of time.

At Hatchmeadow apartments in Northumberland, a key performance characteristic of Proctor Air that helped to address these challenges was its water holdout. That, combined with its vapour and air permeability, offered long-term peace of mind for the building owners, as well as apartment residents.

Multiple challenges presented on a single building

Located close to the town of Ashington in Northumberland, the T-shaped apartment building features a 2500m² pitched roof, including several gables and valleys. Unfortunately, problems with the existing roof specification were causing some residents to experience leaks during periods of poor weather.

To address the issues once and for all, Bemicia tasked Wensley Roofing – part of the Northern Bear family of companies – with stripping back the existing roof and installing a new system.

The roof included an area of solar PV panels, so the new roofing system had to be capable of providing weathertightness and condensation control in several different circumstances across the single building – all while residents remained in occupancy during the work.

Using Proctor Air as part of a ‘belt and braces’ solution

James Roy, Senior Quantity Surveyor at Wensley Roofing, describes the replacement roof system as a “belt and braces” approach.

“The specification used Proctor Air over the rafters, followed by counter battens, tile battens, and a new pantile finish,” he explained. “We even used butyl tape over the nail holes to provide a complete seal against rainwater.”

“The belt and braces approach has made labour a challenge on this project,” said James. “But with the Proctor Air membrane in place, we’ve been comfortable leaving it exposed for a couple of days if necessary, knowing that residents in the apartments below are still protected.”

This reassurance is possible because Proctor Air is rated W1 under EN 13859-1, and has a hydrophobic additive in all three of its layers. Its water resistance meets the guidance of NFRC’s Technical Bulletin 6. Additionally, the

membrane can be left exposed to UV for up to three months.

A unique feature of Proctor Air is that its BBA certificate allows the underlay to be used on roofs featuring solar PV, as long as a ventilated batten space is provided. This is in addition to tightly-jointed slates, tiles and metal sheet, all of which would also normally be considered vapour impermeable.

Because the Hatchmeadow apartments specification featured a counterbatten layer, Proctor Air could be used with confidence across the entire roof, including under the existing area of PV panels.

At Hatchmeadow apartments, the reroofing offered the opportunity to top up the insulation in the roof and provide extra thermal comfort. However, with all the work carried out externally, it wasn’t possible to also check on the continuity and integrity of any vapour control layer (VCL) below the insulation.

Combined with stopping the problem of leaks in bad weather, Proctor Air has helped to provide a complete solution for Bemicia. As James Roy concluded: “The overarching theme with this project is long-term peace of mind – for the client and for the apartment residents.”

Proctor Air - Technical Support

Our products are backed up by a dedicated team of technical experts, able to assist at every project stage from pre-planning to on site. We offer CAD detail reviews, installation guidance, condensation risk analysis, WUFI calculations, U-Value calculations, ground gas system designs, telephone support & more. Our products also have a range of BIM Objects & Performance Specifications.



Customer Focused

- Online Technical Advice
- Members Area / Onsite App
- WUFI & U-Value Calculations
- Condensation Risk Analysis
- CAD Design
- Site Advice
- CPD Presentations
- Accreditations

Expertise and know-how to support your project

CONDENSATION RISK ANALYSIS

Condensation can significantly reduce the effectiveness of insulation, and result in damage to the building fabric. A Condensation Risk Analysis evaluates the likelihood of interstitial condensation in your roof or wall construction. These calculations are regularly required by building control to demonstrate compliance with building regulation requirements. Calculations are performed free of charge when using our products. Online U-Value calculator & condensation risk analysis software available to use.

BIM DATA

Available through NBS Chorus and NBS Source, specifiers can now access a full suite of digital products and technical specifications for many of our product solutions. The collaboration with NBS provides architects and designers with a comprehensive technical specification writing service. In addition, specifiers have easy access to the manufacturer's specification data, BIM objects, literature and third-party certifications.

PRODUCT DIVISIONS

We provide a wide range of high quality, innovative solutions which are designed to meet the continuously evolving requirements of the construction industry.

Product divisions include:

- Condensation Control
- Acoustics Floor Solutions
- External Airtight Barriers
- Ground Gas Protection
- Thermal Solutions

Get in touch for more information

www.proctorgroup.com | +44 (0) 1250 872261
contact@proctorgroup.com



Frequently Asked Questions

How “Breathable” is Proctor Air?

While “Breathability” is a commonly used term, it is more technically accurate to refer to a material’s “vapour permeability”. As Proctor Air is air permeable as well as vapour permeable, it can certainly be argued that it does breathe, as it allows air movement, but this does not hold true for all “breathable” materials. In terms of vapour permeability, Proctor Air, with an Sd-value 0.015m and a vapour resistance of 0.075MNs/g, is one of the most vapour permeable membranes on the market, as well as benefitting from the additional advantage of air permeability.

What difference does air permeability make?

Proctor Air, in addition to having one of the lowest vapour resistance available, is also air permeable. Industry research concluded that air permeability, combined with very low vapour resistance, inhibits the formation of condensation in a pitched roof to the point where it’s virtually impossible for condensation to occur under normal conditions.

Studies conducted by the BRE and Glasgow Caledonian University have concluded that not only does an air permeable roofing underlay outperform

conventional airtight underlays, but may provide a higher air change rate than a roof ventilated according to the recommendations in BS5250.

Does Proctor Air suffer from “tenting”?

As anyone who’s slept in a cheap tent can tell you, some vapour permeable fabrics can lose their water resistance if anything happens to touch the underside. Where the use of underlays fully supported on timber sarking board is standard practice, ensuring Proctor Air does not suffer from this effect was always an important consideration for the A. Proctor Group. In fact while the first generation of VPU’s suffered from this problem, most modern roof underlays are unaffected by this phenomenon.

So vents aren’t required?

The A. Proctor Group have undergone extensive testing to prove that ventilation is not required to the underside of the underlay.

The sole remaining situation where ventilation to the roofspace is required is in a cold roof with Plywood or OSB sarking. If in doubt, our team of technical experts can assist specifiers in achieving the most appropriate



Frequently Asked Questions

solution for their specific project.

How about high level vents?

Although non-ventilated roofs have been specified successfully for many years, recently BS5250, the NHBC technical standards and NFRC Technical Bulletin 6 have recommended that ridge only ventilation equivalent to 5mm per metre is used when vapour permeable underlays are specified. In both cases, the exception to this is where the underlay specified is both vapour AND air permeable.

Does Proctor Air “chatter” in the wind?

Wind blowing up into the eaves of a roof can cause a 'chatter' type noise with some types of underlay. Proctor Air is silent in such situations. As Proctor Air does not suffer from this problem, the membrane does not have to be pulled taut and does not have any special fixing instructions compared to that of some underlays. Counterbattens can be provided to increase the air movement when used with close-fitting slates or tiles, or to provide drainage below the tile battens when used fully supported, but otherwise Proctor Air may simply be draped between the rafters as normal.

Can I use Proctor Air with timber treatments?

All three layers of the Proctor Air underlay have additives to increase the water hold out of the membrane. Timber treatments containing fungicides, insecticides and wood preservatives are extensively used in the building trade to protect rafters, sarking boards and tile battens. Treatments should be dry before installing Proctor Air.

What is the “drying out period”?

This is the period immediately after the building is completed, during which there are significantly higher amounts of moisture within the building. These include moisture in damp timber, from wet trades (concrete, plaster etc) and moisture that may have found its way in, prior to the building shell being wind and watertight. Although this moisture will eventually dry out, condensation is more likely to occur as it does so. This will usually be most apparent in the first winter when the building is heated. Proctor Air roofs are far less prone to this effect. See BBA Bulletin No 1 - Roof Tile Underlay in Cold Roofs during the Drying Out Period.

Frequently Asked Questions

Is Proctor Air expensive?

In terms of the cost per roll, Proctor Air is more expensive than a traditional non-breathable felt, however if we consider the costs associated with ventilation hardware using Proctor Air will save you money. Desktop studies of installation costs show that Proctor Air can offer significant savings when compared with either impermeable felt and full ventilation, or a lower specification VPU with high level ventilation only. The full cost report is available for download at www.proctorgroup.com.

What about severe weather conditions?

The British Board of Agreement has also issued an Information Bulletin (No. 2) relating to good site practice when using permeable roof underlays. This highlights:-

- An underlay is not a total waterproof barrier and if used as a temporary waterproof covering then rain penetration may occur
- In certain conditions, particularly if there is heavy rainfall combined with subsequent severe freeze/thaw conditions, an underlay should not be exposed for more than a few days.

BS 5534

APLR underlays should always be considered as water resistant membranes, based on their function as secondary protection below slates or tiles.

As per section 4.9 Roofing Underlay and Clause 4.9.1 e) 'provide temporary weather protection before the installation of the primary roof covering. An exposed underlay is subjected to UV light which might lead to premature failure; therefore, the exposure periods should be kept to a minimum. In certain conditions, particularly if there is persistent heavy rainfall combined with subsequent severe freeze/thaw conditions, an underlay should not be exposed for more than a few days.

Note 2: *If an underlay has to be left without a roof covering for a period of time when adverse weather rainfall and weather is expected, a tarpaulin or similar protective*

sheeting may be used to protect the underlay until such time that the roof covering can be completed.'

A full copy of this BBA Information Bulletin No.2 - Permeable Roof Tile Underlay Guide to Good Site Practice is available from the BBA web site: www.bbacerts.co.uk.

Why is the NHBC Standards statement different between the two Product Sheets?

Product Sheet 1 – which is for Non-Ventilated Cold Pitched Roofs – states that with Proctor Air, it “*can satisfy the relevant requirements of Chapter 7.2 without the need for additional high-level ventilation.*”

However, you will see on Product Sheet 2 – Warm Non-Ventilated Roofs and Cold Ventilated Roofs – that the statement does not specifically include “without additional high level ventilation”. High Level ventilation is a typical NHBC requirement for ventilated cold pitched roofs which would also be ventilated at eaves level. This does not apply to non-ventilated warm roofs, therefore the statement is slightly different depending on application.

Can Proctor Air be used in all Wind Zones?

Yes. Proctor Air is one of the very few membranes which can be used in Wind Zones 1-4 **without the requirement for additional measures** such as taping the joints or additional battens. This will be required in Zone 5, however it would be more typical in Zone 5 for slates to be used with sarking. As the membrane is fully supported in this case, wind uplift is not an issue.

Although Ireland is not covered by the BBA certificate, the following wind zones for Ireland shows that Proctor Air is compliant for all areas as well as the maximum being Zone 4.

Frequently Asked Questions

Mullen Burst Strength – What is this?

Mullen Burst strengths are now also being added into certificates and is a measure of how robust membranes are during the construction phase.

We have an excellent result for Proctor Air. This helps during the construction phase and will 'resist the loads associated with the installation of the roof'.

Water Resistance

Proctor Air has a confirmed classification of W1.

The BBA also states that the Hydrostatic Head is a pass and is greater than 1m. This is not quoted in all certificates and is a good indication of water hold out and compliance with NFRC Technical Bulletin 6, which is referred to in BS5534.

How is the air permeability stated?

The BBA confirms the air permeability as being $20\text{m}^3/\text{m}^2.\text{h}$ @50 Pa and is confirmed as a PASS. It says greater than or equal to 20, as this is the minimum requirement to be able to claim a membrane as being air permeable under BS 5534.

We have carried out extensive testing and from this, declare a nominal value of $35\text{m}^3/\text{m}^2.\text{h}$ @50Pa which complies with NHBC requirements.

What does the Slip Resistance mean?

This is a newer addition to BBA certificates where they have assessed the slip resistance of the underlays. This is not part of the harmonised standards but are included to ensure health and safety of operatives. The figures for Proctor Air are higher compared to similar membranes, with the statement in clause 4.1.2 that Proctor Air '**has a high coefficient of friction, giving a slip resistance surface for increased safety during the installation of the covering**'.

Note- Normal safe roofing practices still should be observed.

Is a VCL required?

No – Clause 9.1.8 of BBA certificate 24/7417 confirms that a vapour control layer is not required in a cold roof application.

Note – in a warm roof construction, you do need to use either a high resistance insulation/thermal laminate or a vapour check, this could be vapour check plasterboard. In most cases foam insulation, i.e. PIR, will be used which means no VCL is required.

Can PV panels be used with Proctor Air?

Yes. The BBA includes the use of photovoltaic panels. This is the only certificate which mentions PV panels which will be treated in the same way as any other tight-fitting outer covering i.e. ventilation below the panels (in the batten cavity) will be required.



“ I believe the success of the A. Proctor Group is down to a solid foundation of innovation backed up by an excellent, loyal and committed team, every one of them playing an important role in our continued success. Scotland provides us with a unique platform to launch our ideas, systems and products. I am fiercely proud of this heritage and our brand.”

Keira Proctor

Managing Director, A. Proctor Group Ltd



www.proctorgroup.com | +44 (0) 1250 872261
contact@proctorgroup.com

The contents of this literature are provided by A. Proctor Group Limited (APG) in good faith and considered to be factual and accurate at the date of publication. These do not constitute specific technical recommendations and are provided for general information purposes only. It is for the engineer, architect or other relevant professional engaged to advise on any project to assess and satisfy themselves on the suitability of APG products for their intended use on that project. Please note that information contained in this literature may be subject to change with advances in usability and experience.