




PROFLOOR MICRODECK – 17MM
 SCREED (80kg/M3 MIN)
 CONCRETE SLAB (PRECAST OR INSTU)
 RESILIENT CEILING SYSTEM
 ON TIMBER BATTEN

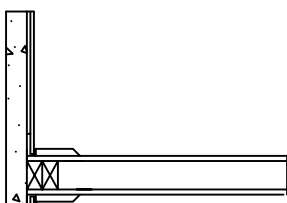

FLANKING/SUPPORT STRIP CUT BACK TO EDGE OF SKIRTING
 PROFLOOR MICRODECK – 17MM
 CONCRETE SUBFLOOR

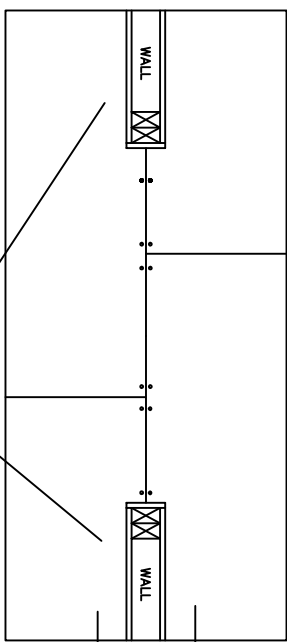

FLANKING STRIP AT ALL WALL PERIMETERS
 PROFLOOR MICRODECK BUTT JOINTED AT DOORWAY
 MAINTAIN ADEQUATE EXPANSION GAP
 PROFLOOR MICRODECK BUTT JOINTED AT DOORWAY
 MAINTAIN ADEQUATE EXPANSION GAP



SCREWS
 7MM SUPPORT FOAM
 USED AT BUTT JOINTS

Profloor MicroDeck – Concrete Floor Details

Date - 17.09.10
 Not To Scale



A Proctor Group
 The Haugh, Blairgowrie, PH10 7ER
 Tel: 01250 872261 – www.proctorgroup.com