


# Wraptite®-FZ

AIRTIGHTNESS

## WHY CHOOSE WRAPTITE-FZ?

Wraptite-FZ is a vapour permeable airtight membrane for use at floor junctions. It is durable, flexible and lightweight, and offers temporary protection against wind driven rain, snow and dust. Wraptite-FZ conforms to the Construction Products Directive and is manufactured under control of an ISO9001 quality management system.

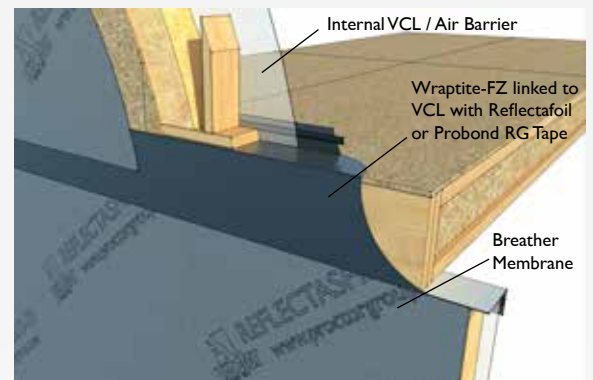

Cassette Floor Junction

## PRODUCT CHARACTERISTICS

PROPERTY	TEST/STANDARD		RESULT	
Roll size			1m x 50m 750mm x 50m	
Product Code			FNS 170	
Mass per unit area	EN 1849-2		170g/m <sup>2</sup>	
Reaction to fire	EN 11925-2		Class E	
Water vapour resistance Sd	EN ISO 12572		0.029 m	
Water penetration	EN 1928	Before ageing: After ageing:	Class W1 Class W1	
Tensile strength	EN 12311-1	Before ageing: After ageing:	MD 400 N MD 340 N	CD 260 N CD 220 N
Elongation	EN 12311-1	Before ageing: After ageing:	MD 80% MD 65%	CD 100% CD 80%
Tear resistance	EN 12310-1		MD 190 N	CD 190 N
Flexibility at low temperature	EN 1109		No cracking at minus 60°C	



Download a full Wraptite brochure from our website...

[www.proctorgroup.com](http://www.proctorgroup.com)

contact@proctorgroup.com | +44 (0) 1250 872261



Insert Code  
**136**

August 2021

